


FAB NOTES

1. MATERIAL SHALL BE AS FOLLOWS +/- .003" .062" THK, 2 OZ.
COPPER BASE WITH 1 OZ. FINISH FOR TOTAL THICKNESS
OF .0042 MIN. - BOTH SIDES. FR-4 MATERIAL
2. HOLE SIZES SHALL BE WITHIN A TOLERANCE OF +/- .003" AFTER
ALL PLATING AND REFLOW (IF APPLICABLE).COPPER PLATING IN THE
HOLES SHALL HAVE A MINIMUM WALL THICKNESS OF .0007"
MIN.
3. APPLY GREEN LPI SOLDERMASK OVER BARE COPPER.
4. ALL TOLERANCES ARE NON ACUMULATIVE.
- 5.APPLY WHITE SILKSCREEN LEGEND COMPONENT SIDE ONLY

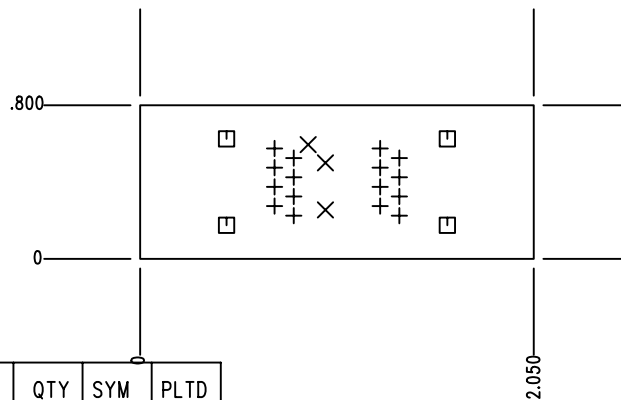

ROCKFORD CORP
FOSGATE DIVISION
PC-1331-A REV A
UNPENDING

SIZE	QTY	SYM	PLTD
37	16	+	PLTD
30	3	X	PLTD
125	4	□	PLTD