




**Model:** P132

**Type:** Punch 3.5" 2-way coaxial

**Power Rating:** 20 Watts (RMS)


**Impedance:** 4 ohms

**Freq. Response:** 120 - 22kHz

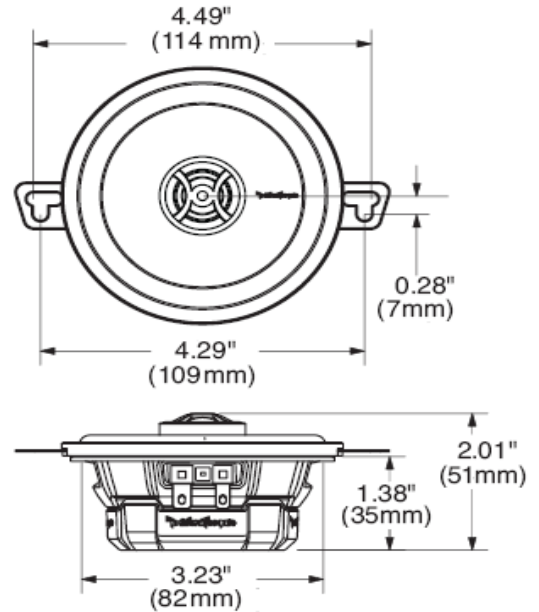

**Technical Highlights**

- Injection molded mineral filled polypropylene cone
- Linear high excursion matched motor magnetics and suspension design
- 0.5" (13mm) Treated PEI dome tweeter
- VAST™ Vertical Attach Surround Technique SBR surround
- ICC™ Integrated Concealed Crossover components (12dB per octave)
- StampCast™ Frame structure
- Mounting hardware included

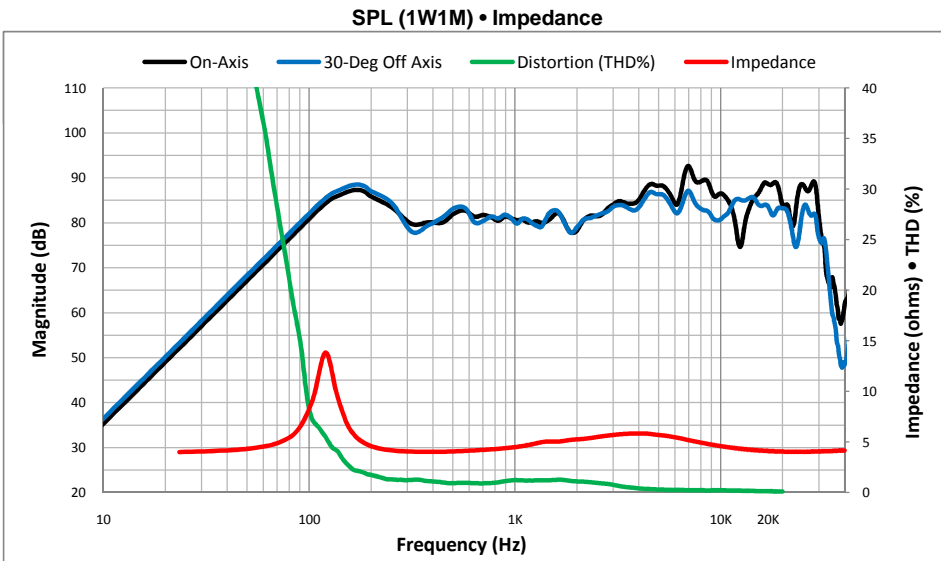

Frequency response includes summed Far-Field and Near-Field IEC60268-5 baffle measurements.

**Thiele-Small Specifications**

- Fs (Hz): 120
- Re (Ohms): 3.9
- Le (mH): 0.16
- Qts: 1.21
- Qes: 1.65
- Qms: 4.53
- Cms (mm/N): 0.39
- Vas (L): 1.07
- Mms (g): 4.4
- Mmd (g): 4.3
- Rms (kg/s): 0.74
- Airload (g): 0.17
- No (%): 0.11
- SPL (dB - 1W/1M): 85
- BL (T\*M): 2.8
- \*Xmax<sub>10</sub> (mm): 1.7
- Sd (cm<sup>2</sup>): 44
- EBP: 72.727
- Krm (mOhms): 0.3229
- Erm: -0.02
- Kxm (mH): 0.0027
- Exm: 0.62
- Rem (Ohms): 0.0003

**Technical Specifications**

Voice Coil Diameter:	0.7874	20	inches   mm
Voice Coil Height:	0.20	5.2	inches   mm
Voice Coil Layers:	2		layers
Magnetic Gap Height:	0.16	4.0	inches   mm
Linear Excursion, pk-pk (Xmax):	0.12	3.1	inches   mm
Maximum Excursion, pk-pk:	0.17	4.40	inches   mm
Magnet Weight:	4.19	0.12	oz.   kg
Woofer Displacement:	0.10	0.00	liters   cubic ft.
Net Weight:	2.10	0.95	lbs.   kg
Power Rating:	20	40	RMS   Peak

\* All parameters are derived using a laser velocity measurement method and verified with actual measured Mmd and Re. Xmax<sub>10</sub> represents actual effective excursion at <10% THD.