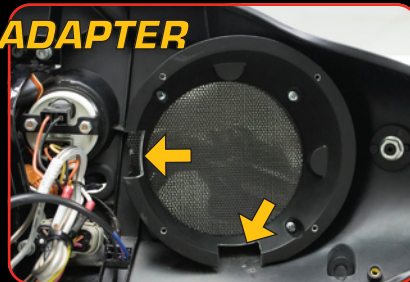


STREET GLIDE® FAIRING STYLE (Batwing)

REMOVE


Remove fairing to gain access to speakers. Once removed, unplug and remove speakers and mounting ring. Retain factory woven speaker grille.

ADAPTER


Align adapter with factory screw holes and attach with supplied screws. Be sure gasket is properly seated between grille and adapter. Example shown above is for speakers with bridge mounted tweeters. Use wire cutters and pliers to remove tabs. Apply gaskets to notches prior to speaker placement.

CONNECT


Install speaker using screws supplied with speaker and reattach speaker wires. Be sure to use proper polarity when connecting speaker. Test and reassemble fairing.

ROAD GLIDE® FAIRING STYLE (Shark Nose)

REMOVE


Remove fairing to gain access to speakers. Once removed, unplug and remove speakers.

ADAPTER


Align adapter with factory screw holes and attach with supplied screws. Be sure gasket is properly seated between grille and adapter.

CONNECT


Install speaker using screws supplied with speaker and reattach speaker wires. Be sure to use proper polarity when connecting speaker. Test and reassemble fairing.

Speaker Fitment Guide

PRIME	PUNCH	POWER
R165X3	P1650	T1650*
	P1675	T1675*

* T1650 & T1675 speakers will not fit on Road Glide® motorcycles.

...Find Out More About These Products
www.rockfordfosgate.com/products

1010-59673-01
 Rockford Fosgate Arizona, USA



Made in China