

# 1998+ Harley-Davidson® Road King®

## M5-800X4 Tuning Guide




**Maximum Mobile Device Volume: 95%**  
For optimum sound quality and prevent speaker damage, keep volume setting at 95% or below.



## AMPLIFIER TUNING

Before installing amplifier, remove cover and set PRESET to OFF position. Verify remaining settings are properly configured. Replace cover for water-tight protection.

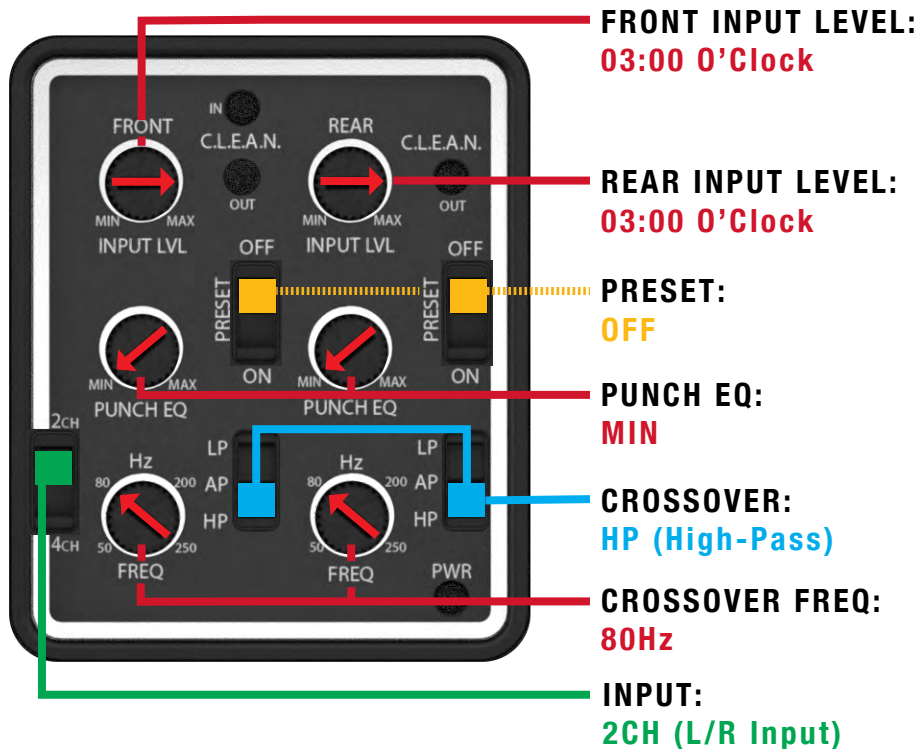

## BLUETOOTH PAIRING

Once installation is complete, reduce volume on your mobile device and follow the steps below to pair your device with the Bluetooth module. Subsequent pairing will be automatic.

- 1 Turn motorcycle ignition to ACCESSORY.
- 2 PRESS & HOLD Bluetooth button for 2 seconds.
- 3 DISCOVER mode will begin when module audibly chimes and 2 outer LEDs begin to alternately flash.
- 4 PAIR mobile device using one of the following methods:

### iOS:

1. Go to SETTINGS > BLUETOOTH.
2. Select RFBTRCA.
3. Pairing is confirmed with an audible chime and all 3 LEDs will illuminate.

### ANDROID:



1. Go to SETTINGS > CONNECTED DEVICES > BLUETOOTH.
2. Select PAIR NEW DEVICE.
3. Select RFBTRCA.
4. Choose ALLOW TO PAIR.
5. Once pairing is complete you will hear an audible chime and all 3 LEDs will illuminate.

# 1998+ Harley-Davidson® Road King® M5-800X4 Tuning Guide




## OPTIONAL FRONT LOWER OUTPUTS

### FRONT LOWER HARNESS

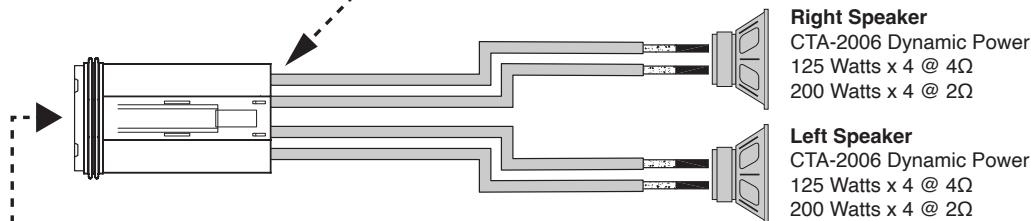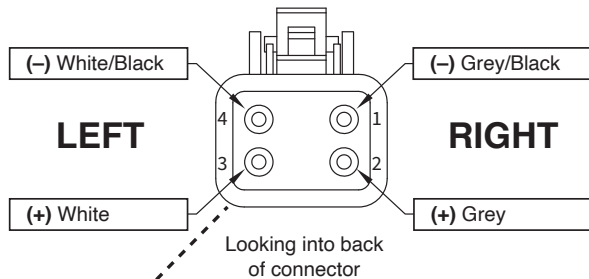

### BATTERY & SPEAKER HARNESS

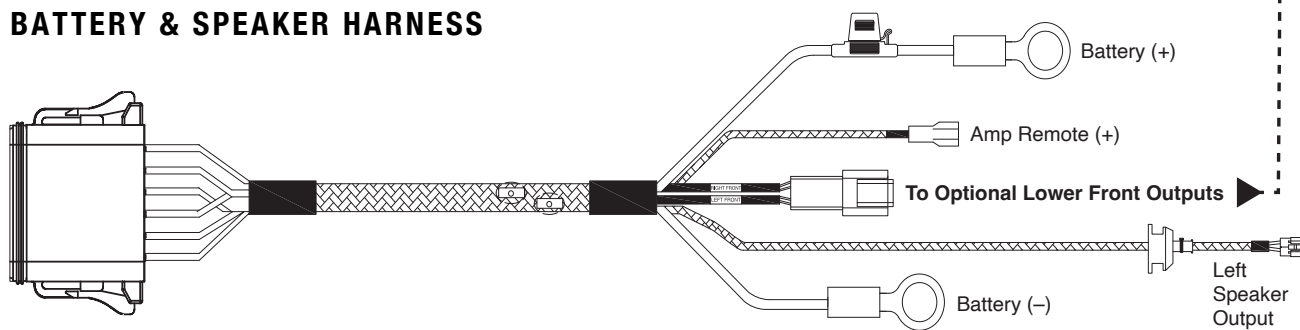

### FRONT INPUT LEVEL

#### 4Ω Lower Speakers:

Retain front input level at 3:00 o'clock setting as illustrated on opposite side.

#### 2Ω Lower Speakers:

Reduce front input level until sound is balanced with rear saddlebag speakers.

