

1998-2013 Harley-Davidson® M5-800X4 Tuning Guide

Maximum Radio Volume: Radio clips prematurely. Do not exceed 12 bars.



MOTORCYCLE AUDIO

#ROCKFORDFOSGATE



**Harmon Kardon
Factory Radio**




RADIO EQ O.K.
no flash required

TURN-ON O.K.
blue remote wire not required

AMPLIFIER TUNING

Before installing amplifier, remove cover and set PRESET to OFF position. Verify remaining settings are properly configured. Replace cover for water-tight protection.

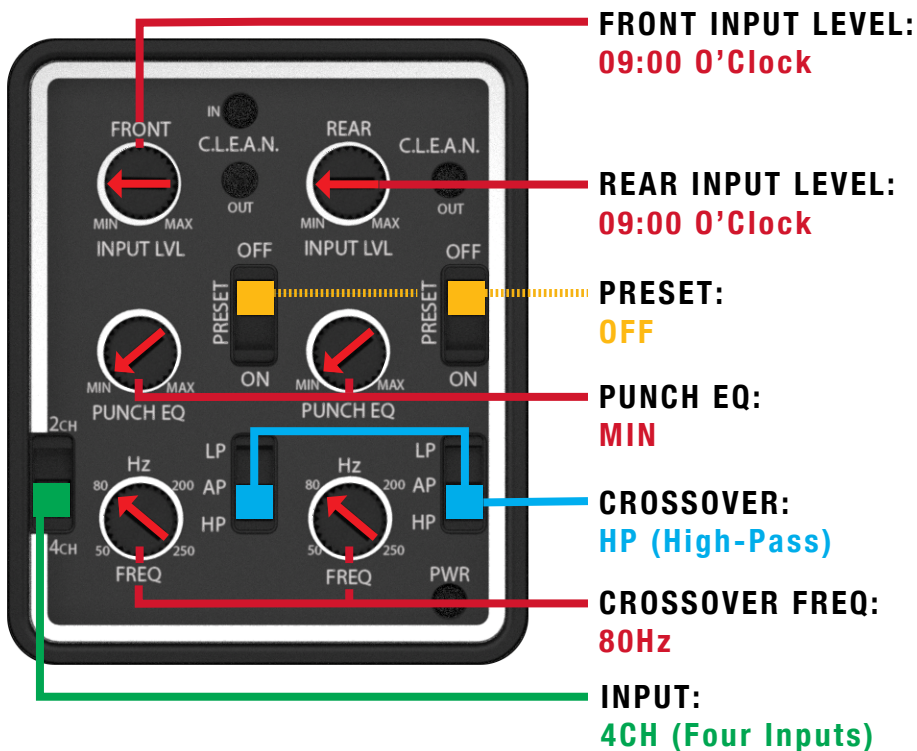

SYSTEM TEST

After system is installed, test for proper operation. Press the AUDIO switch to cycle thru and configure these radio options:



BASS:

Set to CENTER position.



TREBLE:

Set to CENTER position.



FADER (FLHTCU Models):

Test front/back fader control.
Set to DESIRED rider position.



DISPLAY:

Set to DESIRED contrast.



VOLUME:

Set to DESIRED setting for each source.



ADV (Automatic Volume Control):

Turn OFF. The AVC can clip audio output and damage your speakers.