




Rockford Fosgate

MOBILE · MARINE · MOTORSPORTS · MOTORCYCLE
PURPOSE BUILT AUDIO™



INSTALLATION ADVISORY

REQUIRED GEN-2 COLOR OPTIX™ CABLES WHEN INSTALLING M1 & M2 SPEAKERS



**RGB-6
RGB-16
RGB-25**



RGB-Y4P



RGB-Y6P

CABLES NEEDED FOR EACH SPEAKER INSTALLED

CABLE	M1 & M2 SPEAKERS / SUBWOOFERS	M1 & M2 MOTO-CANS	M2 WAKE-CANS
RGB-6 / RGB-16 / RGB-25	✓	✓	✓
RGB-Y4P	✓	✗	✗
RGB-Y6P	✗	✓	✓

MODELS COVERED:

- **RGB-6:** 6 Ft. Color Optix™ Extension Cable for PMX-RGB
- **RGB-16:** 16 Ft. Color Optix™ Extension Cable for PMX-RGB
- **RGB-25:** 25 Ft. Color Optix™ Extension Cable for PMX-RGB
- **RGB-Y4P:** 4-Pin Color Optix™ Y-Adaptor for PMX-RGB
- **RGB-Y6P:** 6-Pin Color Optix™ Y-Adaptor for PMX-RGB





INSTALLATION ADVISORY:

New Gen-2 Color Optix™ cables require different configurations required to connect Color Optix™ compatible speakers to the PMX-RGB controller. Please refer to the table and diagrams for proper cable configurations.

NOTE: The PMX-RGB is designed to accommodate 8 speakers/subwoofers for ideal illumination. A maximum capacity of 16 speakers and/or subwoofers on 100-ft (30.48 m) of total cable length can be accomplished. Slight LED dimming may occur at the end of the string.


M1 & M2 SPEAKERS & SUBWOOFERS

COLOR OPTIX™ CABLES REQUIRED

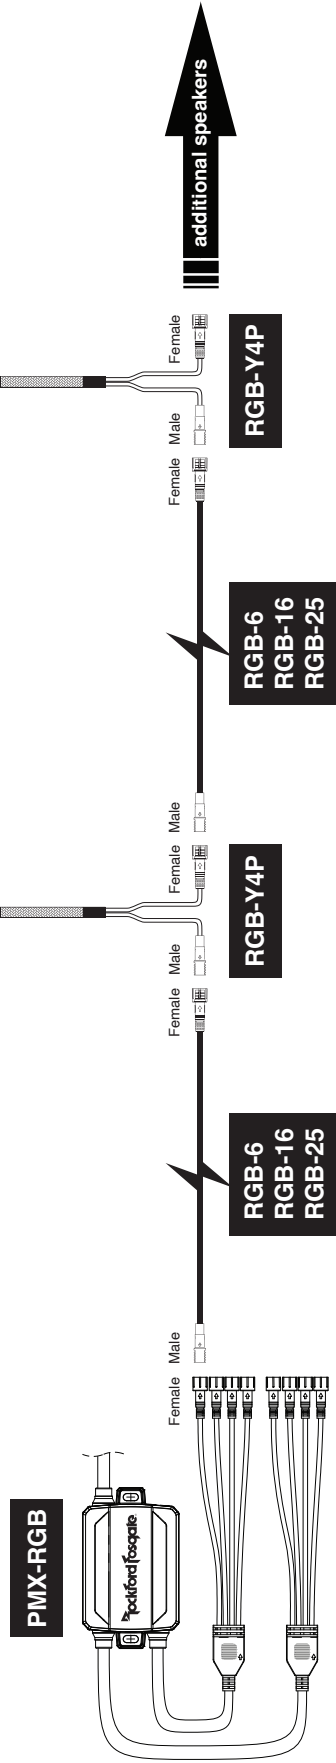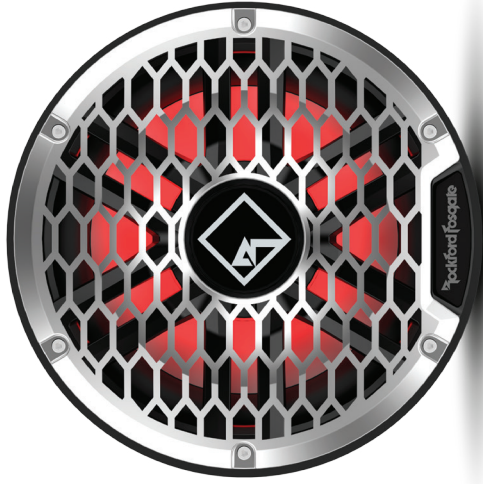

M1 & M2 MOTO-CANS

COLOR OPTIX™ CABLES REQUIRED

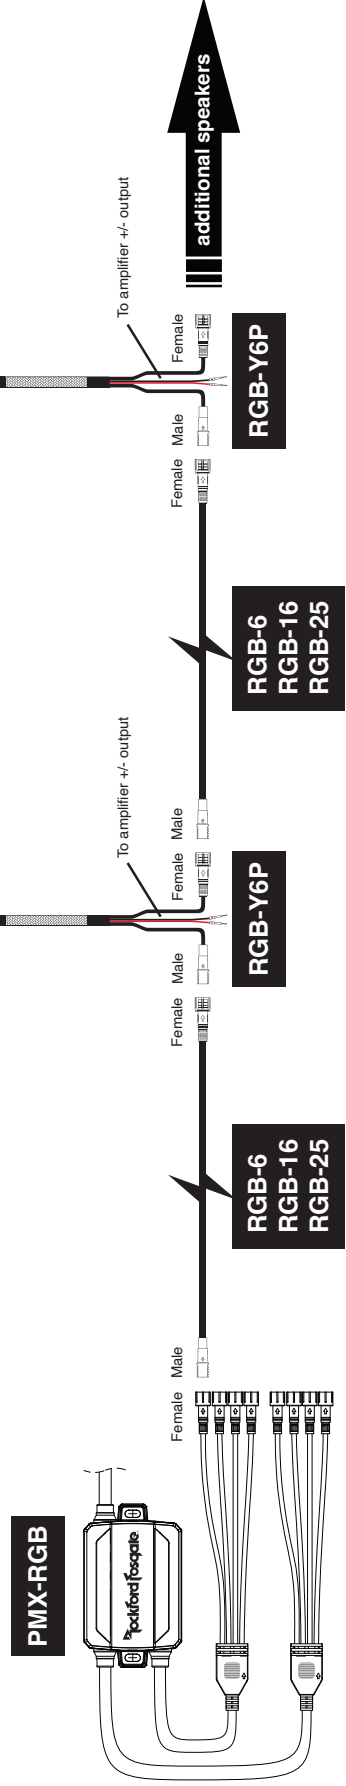

M2 WAKE-CANS COLOR OPTIX™ CABLES REQUIRED

